


37. 大型フリューム（農業土木事業協会規格）

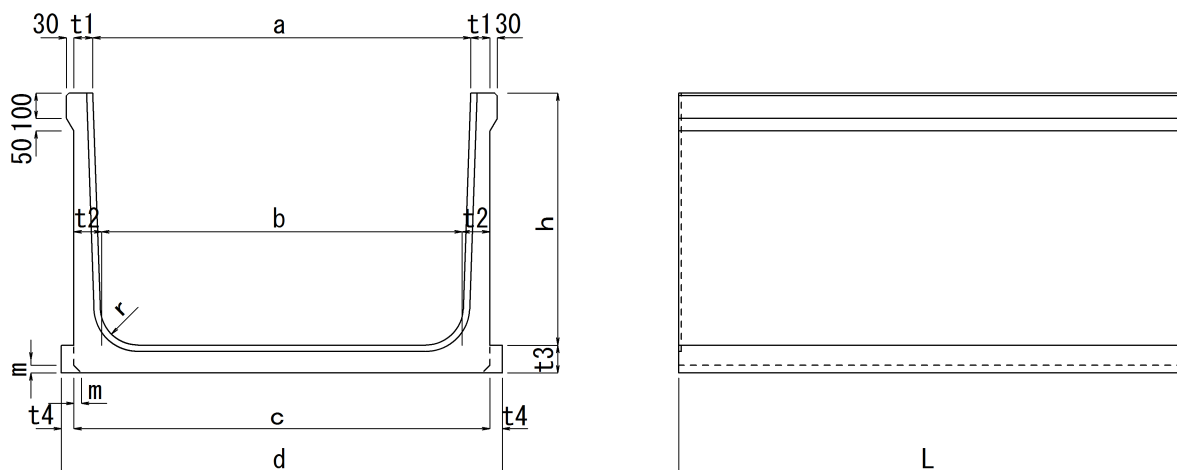

壁頂部水平線上の載荷重及び土質条件による区分

種 類	載荷重 (kN/m ²)	土の内部摩擦角	適用する壁の高さ
I 種	10.0	30°	高さ 700mm～2,000mm
II 種	15.0	25°	高さ 700mm～2,000mm
III 種	20.0	20°	高さ 700mm～1,600mm

H700～H800

呼び名	寸 法 (mm)												参考重量(kg)		抵抗モーメント(Ⅰ種) (kN・m/m)
	h	a	b	c	d	t1	t2	t3	t4	r	m	L	W1	W2	
0710	700	1,000	950	1,140	—	70	95	95	0	100	30	2,000	—	1,100	1.916
0711		1,100	1,050	1,240	—								—	1,160	
0712		1,200	1,150	1,340	—								—	1,200	
0713		1,300	1,250	1,440	1,540								1,300	1,250	
0714		1,400	1,350	1,540	1,640								1,340	1,290	
0715		1,500	1,450	1,640	1,740								1,380	1,330	
0716		1,600	1,550	1,740	1,840								1,420	1,370	
0717		1,700	1,650	1,840	2,040								1,510	1,420	
0718		1,800	1,750	1,940	2,140								1,550	1,460	
0719		1,900	1,850	2,040	2,240								1,600	1,510	
0720		2,000	1,950	2,140	2,340								1,640	1,550	
0810	800	1,000	950	1,140	—	70	95	95	0	100	30	2,000	—	1,180	1.916
0811		1,100	1,050	1,240	—								—	1,230	
0812		1,200	1,150	1,340	1,440								1,320	1,270	
0813		1,300	1,250	1,440	1,540								1,370	1,320	
0814		1,400	1,350	1,540	1,640								1,410	1,360	
0815		1,500	1,450	1,640	1,740								1,450	1,400	
0816		1,600	1,550	1,740	1,940								1,540	1,450	
0817		1,700	1,650	1,840	2,040								1,580	1,490	
0818		1,800	1,750	1,940	2,140								1,630	1,540	
0819		1,900	1,850	2,040	2,240								1,680	1,590	
0820		2,000	1,950	2,140	2,340								1,740	1,650	

※抵抗モーメントは参考値です。

※Ⅱ種、Ⅲ種の抵抗モーメントは、お問い合わせください。

※2tを超える製品は、車上渡しになります。

※張出(t4)を設けることができます。

※張出を設けない場合の(m)は30mmです。

※参考重量のW2は、張出の無い場合です。

37. 大型フリューム（農業土木事業協会規格）

H900～H1, 200

呼び名	寸 法 (mm)											参考重量(kg)		抵抗モーメント(1種) (kN・m/m)	
	h	a	b	c	d	t1	t2	t3	t4	r	m	L	W 1		W 2
0910	900	1,000	950	1,150	－	75	100	100	0	100	30	2,000	－	1,340	2.224
0911		1,100	1,050	1,250	－				－		1,390				
0912		1,200	1,150	1,350	1,450				1,480		1,430				
0913		1,300	1,250	1,450	1,550				1,530		1,480				
0914		1,400	1,350	1,550	1,650				1,570		1,520				
0915		1,500	1,450	1,650	1,750				1,620		1,570				
0916		1,600	1,550	1,750	1,950				1,720		1,620				
0917		1,700	1,650	1,850	2,050				1,770		1,670				
0918		1,800	1,750	1,950	2,150				1,810		1,710				
0919		1,900	1,850	2,050	2,250				1,860		1,760				
0920		2,000	1,950	2,150	2,350				1,900		1,800				
1010	1,000	1,000	930	1,150	－	75	110	110	0	150	30	2,000	－	1,530	2.905
1011		1,100	1,030	1,250	－				－		1,590				
1012		1,200	1,130	1,350	－				－		1,640				
1013		1,300	1,230	1,450	1,550				1,760		1,700				
1014		1,400	1,330	1,550	1,650				1,810		1,750				
1015		1,500	1,430	1,650	1,750				1,860		1,800				
1016		1,600	1,530	1,750	1,850				1,910		1,850				
1017		1,700	1,630	1,850	2,050				2,010		1,900				
1018		1,800	1,730	1,950	2,150				2,070		1,960				
1019		1,900	1,830	2,050	2,250				2,120		2,010				
1020		2,000	1,930	2,150	2,350				2,170		2,060				
1111	1,100	1,100	1,030	1,260	－	80	115	115	0	150	30	2,000	－	1,770	3.476
1112		1,200	1,130	1,360	－				－		1,820				
1113		1,300	1,230	1,460	－				－		1,880				
1114		1,400	1,330	1,560	1,660				1,990		1,930				
1115		1,500	1,430	1,660	1,760				2,050		1,990				
1116		1,600	1,530	1,760	1,860				2,110		2,050				
1117		1,700	1,630	1,860	1,960				2,160		2,100				
1118		1,800	1,730	1,960	2,160				2,260		2,150				
1119		1,900	1,830	2,060	2,260				2,310		2,200				
1120		2,000	1,930	2,160	2,360				2,360		2,250				
1121		2,100	2,030	2,260	2,460				2,420		2,310				
1212	1,200	1,200	1,120	1,370	－	85	125	125	0	150	30	2,000	－	2,070	4.316
1213		1,300	1,220	1,470	－				－		2,130				
1214		1,400	1,320	1,570	－				－		2,190				
1215		1,500	1,420	1,670	1,770				2,310		2,250				
1216		1,600	1,520	1,770	1,870				2,360		2,310				
1217		1,700	1,620	1,870	1,970				2,420		2,360				
1218		1,800	1,720	1,970	2,070				2,480		2,420				
1219		1,900	1,820	2,070	2,270				2,600		2,480				
1220		2,000	1,920	2,170	2,370				2,660		2,540				
1221		2,100	2,020	2,270	2,470				2,720		2,600				
1222		2,200	2,120	2,370	2,570				2,770		2,650				

※抵抗モーメントは参考値です。

※Ⅱ種、Ⅲ種の抵抗モーメントは、お問い合わせください。

※2 tを超える製品は、車上渡しになります。

※張出(t4)を設けることができます。

※張出を設けない場合の(m)は30mmです。

※参考重量のW2は、張出の無い場合です。

37. 大型フリューム（農業土木事業協会規格）

H1, 300～H1, 500

呼び名	寸 法 (mm)											参考重量(kg)		抵抗モーメント(1種) (kN・m/m)					
	h	a	b	c	d	t1	t2	t3	t4	r	m	L	W 1		W 2				
1313	1,300	1,300	1,210	1,490	－	95	140	140	0	150	30	2,000	－	2,500	5.877				
1314		1,400	1,310	1,590	－								－	2,560					
1315		1,500	1,410	1,690	－								－	2,630					
1316		1,600	1,510	1,790	－								－	2,690					
1317		1,700	1,610	1,890	1,990								2,830	2,760					
1318		1,800	1,710	1,990	2,090				50	150	－		2,890	2,820					
1319		1,900	1,810	2,090	2,190								2,960	2,890					
1320		2,000	1,910	2,190	2,390								3,040	2,950					
1321		2,100	2,010	2,290	2,490				100				3,160	3,020					
1322		2,200	2,110	2,390	2,590								3,230	3,090					
1323		2,300	2,210	2,490	2,690								3,300	3,160					
1414	1,400	1,400	1,310	1,610	－	105	150	150	0	150	30	2,000	－	2,890	7.027				
1415		1,500	1,410	1,710	－								－	2,960					
1416		1,600	1,510	1,810	－								－	3,030					
1417		1,700	1,610	1,910	－								－	3,080					
1418		1,800	1,710	2,010	2,110								3,250	3,170					
1419		1,900	1,810	2,110	2,210				50	150	－		3,320	3,240					
1420		2,000	1,910	2,210	2,310								3,390	3,310					
1421		2,100	2,010	2,310	2,410								3,460	3,380					
1422		2,200	2,110	2,410	2,610								3,600	3,450					
1423		2,300	2,210	2,510	2,710				100				3,670	3,520					
1424		2,400	2,310	2,610	2,810								3,740	3,590					
1517	1,500	1,700	1,600	1,920	－	110	160	160	0	250	30	2,000	－	3,510	7.609				
1518		1,800	1,700	2,020	－								－	3,580					
1519		1,900	1,800	2,120	2,220								3,730	3,650					
1520		2,000	1,900	2,220	2,320				50	250	－		3,810	3,730					
1521		2,100	2,000	2,320	2,420								3,880	3,800					
1522		2,200	2,100	2,420	2,520								3,960	3,880					
1523		2,300	2,200	2,520	2,720								4,120	3,960					
1524		2,400	2,300	2,620	2,820								4,190	4,030					
1525		2,500	2,400	2,720	2,920				100				4,270	4,110					
1526		2,600	2,500	2,820	3,020								4,340	4,180					
1527		2,700	2,600	2,920	3,120								4,410	4,250					

※抵抗モーメントは参考値です。

※Ⅱ種、Ⅲ種の抵抗モーメントは、お問い合わせください。

※2 tを超える製品は、車上渡しになります。

※張出(t4)を設けることができます。

※張出を設けない場合の(m)は30mmです。

※参考重量のW2は、張出の無い場合です。

寸法の許容差

呼 び 名	幅	壁 高	壁 厚	底厚・張出	長さ
	a, b, c	h	t1 , t2	t3 , t4	L
0710～1323	±7	+6 , -4	+5 , -2	+6 , -2	±5
1414～1527	±8	+7 , -5	+6 , -3	+7 , -3	±5